




STANDARD LOADMASTER MIXER	OPTIONAL EXTRAS
<ul style="list-style-type: none"> <li>✓ Barrel with 8mm dished end</li> <li>✓ Frame including, chute rack, swivel chute, feed chute, oil tank and cooler.</li> <li>✓ Standard Gearbox</li> <li>✓ Ally sliding Ladder and platform</li> <li>✓ Single rear step and grab handle drivers side</li> <li>✓ LED work light and tail lights</li> <li>✓ Hyd motor and pump</li> <li>✓ Plastic guards (Rear only)</li> <li>✓ 2 x steel frame poly lined extension chutes, 1 x ½ steel framed poly lined placement chute</li> <li>✓ Remote controls with transit mode</li> <li>✓ Steel trunnion rollers with side mounted safety guards</li> <li>✓ Water meter and slump gauge</li> <li>✓ Double acting hydraulic ram</li> <li>✓ 200L pressurised water system</li> <li>✓ Painted in polyurethane paint – one colour barrel - one colour frame NO company LOGO</li> <li>✓ Removable inlet bridge</li> </ul>	<ul style="list-style-type: none"> <li>✓ Running board style guards</li> <li>✓ 2<sup>nd</sup> Barrel colour – Company Logo and livery</li> <li>✓ No ladder or Platform</li> <li>✓ Reverse camera</li> <li>✓ Clear coat on barrel</li> <li>✓ CML gear box</li> <li>✓ Single step both sides</li> <li>✓ Double step both sides</li> <li>✓ Triple step both sides</li> <li>✓ Full Placement chute</li> <li>✓ Ally framed chutes poly lined</li> <li>✓ Full ally chutes</li> <li>✓ Full diff Mudflaps</li> <li>✓ Spray suppressant's</li> <li>✓ Side intrusion</li> <li>✓ Swivel – feed chute Vibrator</li> <li>✓ Chute raise and lower switch at rear</li> </ul>

*Advances in design or improvements in materials are incorporated without delay, consequently we reserve the right to alter details given on this specification sheet without notice. Centre of gravity may vary depending on selected options.*

# The Loadmaster - Specification

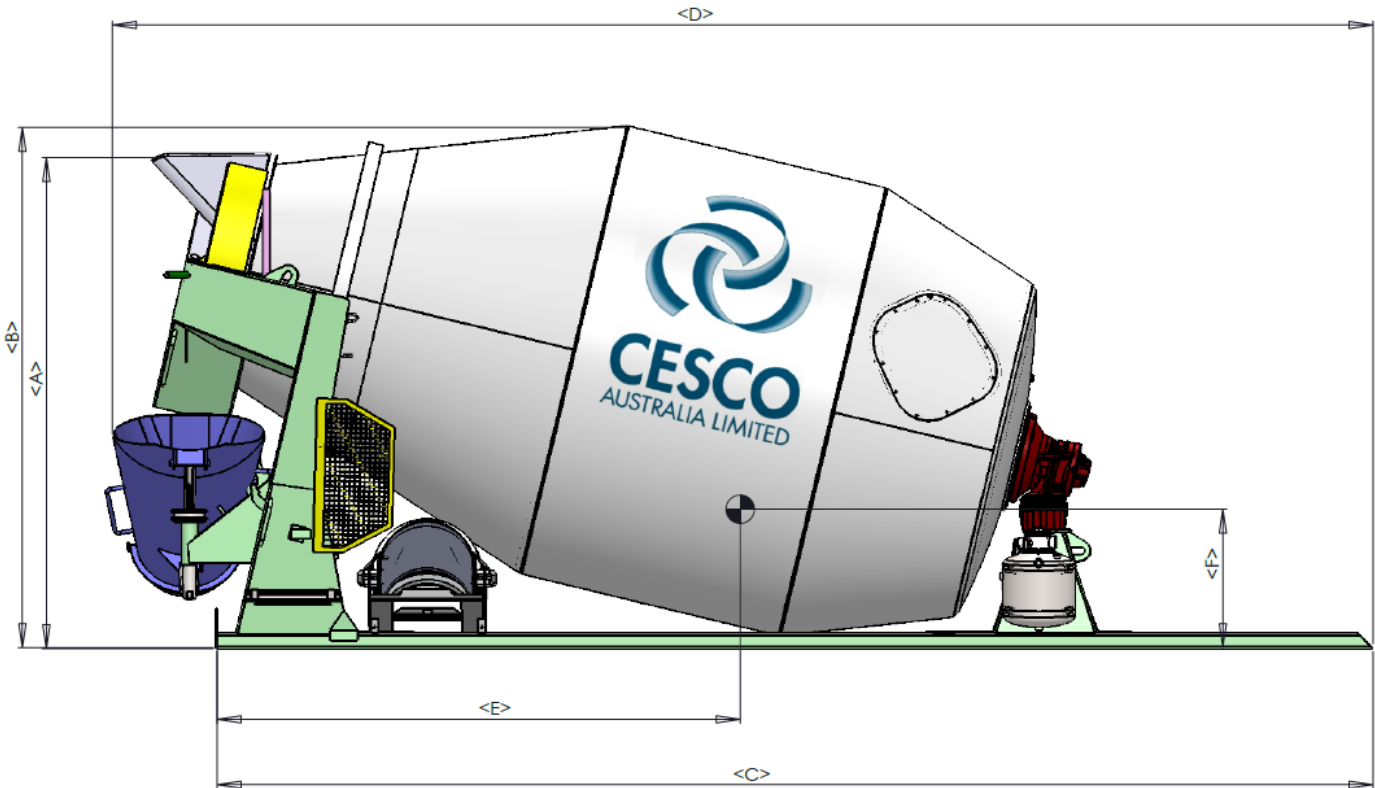

Dimensions	6.5 m <sup>3</sup>	7.6 m <sup>3</sup>	8.0 m <sup>3</sup>	9.0m <sup>3</sup>
Total Barrel Volume	10.1 m <sup>3</sup>	12.2 m <sup>3</sup>	13.1 m <sup>3</sup>	13.8m <sup>3</sup>
Mixing Capacity to AS1379 - 2007	6.5 m <sup>3</sup>	7.6 m <sup>3</sup>	8.0 m <sup>3</sup>	9.0m <sup>3</sup>
Height to Feed Chute (A)	2,410 mm	2,480 mm	2,530 mm	2,600 mm
Height Overall (B)	2,540 mm	2,620 mm	2,680 mm	2,720 mm
Nominal Length on Truck Chassis (C)	4,900 mm	5,100 mm	5,350 mm	5,840 mm
Nominal Length Overall (D)	5,400 mm	5,600 mm	5,850 mm	6,370 mm
Centre of Gravity – estimated (E)	2,300 mm	2,620 mm	2,750 mm	2,998 mm
Height of Centre of Gravity (approx.) (F)	947 mm	936 mm	966 mm	1010 mm
<b>Barrel Specification:</b>				
<b>Width</b>				
Dished End	8mm High Tensile Reinforced	Width over Mudguards	2,460 mm	
Back Cone	4mm Rheemalloy High Tensile	Outside Chassis Width	860 mm	
Nose Cone	4mm Rheemalloy High Tensile	Standard Chassis Rails	100 x 76 x 5 RHS	
Mix Blades	4mm Rheemalloy High Tensile			
<b>Cesco Australia Limited</b>				
Brisbane:	Head Office			
	Mixer Service Centre:	38 Goodman Place Murarrie Qld 4172	Ph: 07 3908 6088	F: 07 3390 6898
Melbourne:	Mixer Service Centre:	76-78 Hallam South Road Hallam Vic 3903	Ph: 03 9796 4977	F: 03 9796 4811

**Note: Specifications and mixer layout are for references only and subject to actual applications and components availability.**