



FOUNDATION ASSOCIATES ENGINEERING PTE LTD

5, Tuas Avenue 1, Singapore 639490
 Tel: (65) 6863 1633 Fax: (65) 6863 1455
 Email: fnapl@singnet.com.sg Website: http://www.fnapl.com


A member of the **ZICOM GROUP**



CESCO
 AUSTRALIA LIMITED


38 Goodman Place, Moorarie QLD 4172
 P.O. Box 7138, Hermant QLD 4174
 www.cescoaustralia.com
 Tel: +617 3908 6088 Fax: +617 3390 6898

FAV 44-50HD HYDRAULIC VIBRATORY HAMMER

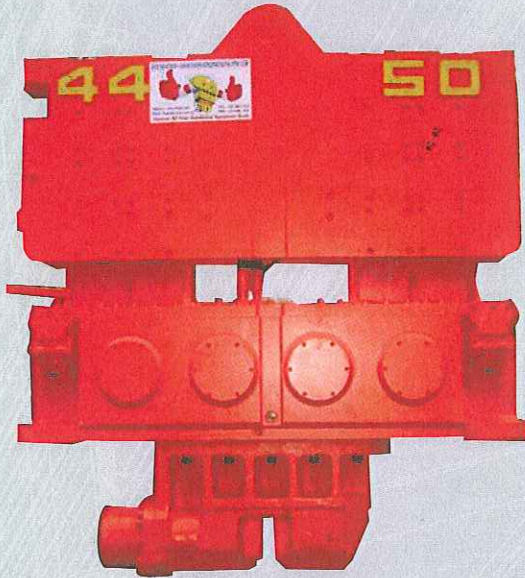

Eccentric moment	4,400 in-lbs (50.7 kgm)
Frequency	1600 vpm (1600 vpm)
Centrifugal force	160 tons (1427 kN)
Amplitude (free hanging)	1.17 in (30 mm)
Max line pull for extracting	80 US ton (710 kN)
Weight (no clamps & hoses)	11,500 lbs (5215 kg)
Non-vibrating weight	4,000 lbs (1815 kg)
Height (without clamp)	83 in (2130 mm)
Length (inclu: hose chute)	105 in (2680 mm)
Width	22 in (560 mm)
Throat width	14.25 in (360 mm)
Hydraulic hose length	150 ft (45 m)
Hydraulic hose weight (w/o oil)	1,700 lbs (770 kg)

FAV 570 & 600 POWERPACK

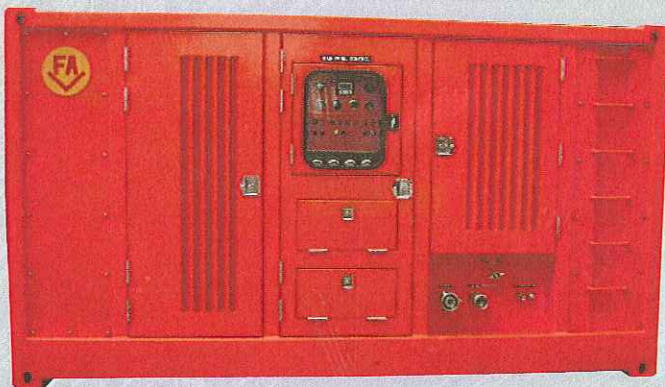

FAV 600

Engine: John Deere 6125 Brand New
 Max. Drive Flow: 620 litres / min
 Max. Drive Pressure: 320 bar
 Power: 600 HP
 Operating Speed: 2100 rpm

- Conceal exhaust silencer and 4 lifting eyes
- Stainless steel latches & hinges
- Noise reduction panels
- External fuel & hydraulic tank inspection allocations
- 3800 (L) x 1650 (B) x 1900 (H)
- 7 Ton (approx.)

Optional: Different make of new and refurbished diesel engines are available upon requests