



CESCO AUSTRALIA LTD

STEERABLE "SUPA MAXI"



Quality
ISO 9001
SAI GLOBAL



STANDARD STEERABLE TRAILER MIXER	OPTIONS
<ul style="list-style-type: none"> ❖ Barrel with 8mm dished end ❖ Feed chute, Swivel chute ❖ Fold Down access ladder both sides ❖ Gearbox ZF7300 ❖ 130/75 pump and motor, slump gauge ❖ Pressed Alloy chequer plate guards ❖ 2 x poly extension chutes, 1 x poly placement chute ❖ Remote controls ❖ 4 x Nylon rollers ❖ Remote operated [up and down] hydraulic chute jack ❖ 300L pressurised alloy water tank system, water meter ❖ Painted in polyurethane paint – one colour barrel one colour frame 	<ul style="list-style-type: none"> ❖ High wearing light weight barrel steel ❖ ZF CML 12 gearbox ❖ 2 colour barrel ❖ 200 Ltr water tank ❖ Remote switch chute lock operation ❖ LED light bar work light ❖ Water gun both sides ❖ Trailer legs
<h3>STANDARD STEERABLE BTE TRAILER</h3>	
<ul style="list-style-type: none"> ❖ Chassis: Manufactured principally from Domex 700MPA high strength steel, pressed Domex suspension and chassis cross members, tapered rear chassis section. ❖ Skidplate: Oscillating skidplate with 50mm kingpin. ❖ Axles: Two off SAF Disc brake steer axles fitted with VSE electro hydraulic steering system and remote control, axles fitted with 10 stud 335mm PCD hubs and disc brakes one fixed non steer axle in front location complete with lift function. ❖ Suspension: SAF Module airbag suspension ❖ Brake control: Knorr Bremse EBS triaxle brake kit, with quick release couplings mounter on front bulkhead. ❖ Electrical: Full wiring loom with LED stop, tail and indicators including plug in loom extension for three off (3) Narva clearance lights per side one centre indicator mounted off chassis. ❖ Landing Legs: Mounting provision only. ❖ Painting: All steel work cleaned, primed and painted in 2 K to match fleet colours. ❖ Wheels and tyres: 6 off 10 stud 335mm PCD polished aluminum wheels with Haulmax tubeless 385/65R22.5 tyres fitted. ❖ Mudguards: Pressed aluminum chequer plate with centre infill, stainless steel handrails and fold down ladders on each side. 	

Visit our website: www.cescoaustralia.com

A member of the ZICOM GROUP




Specification

STEERABLE "SUPA MAXI"



Quality
ISO 9001

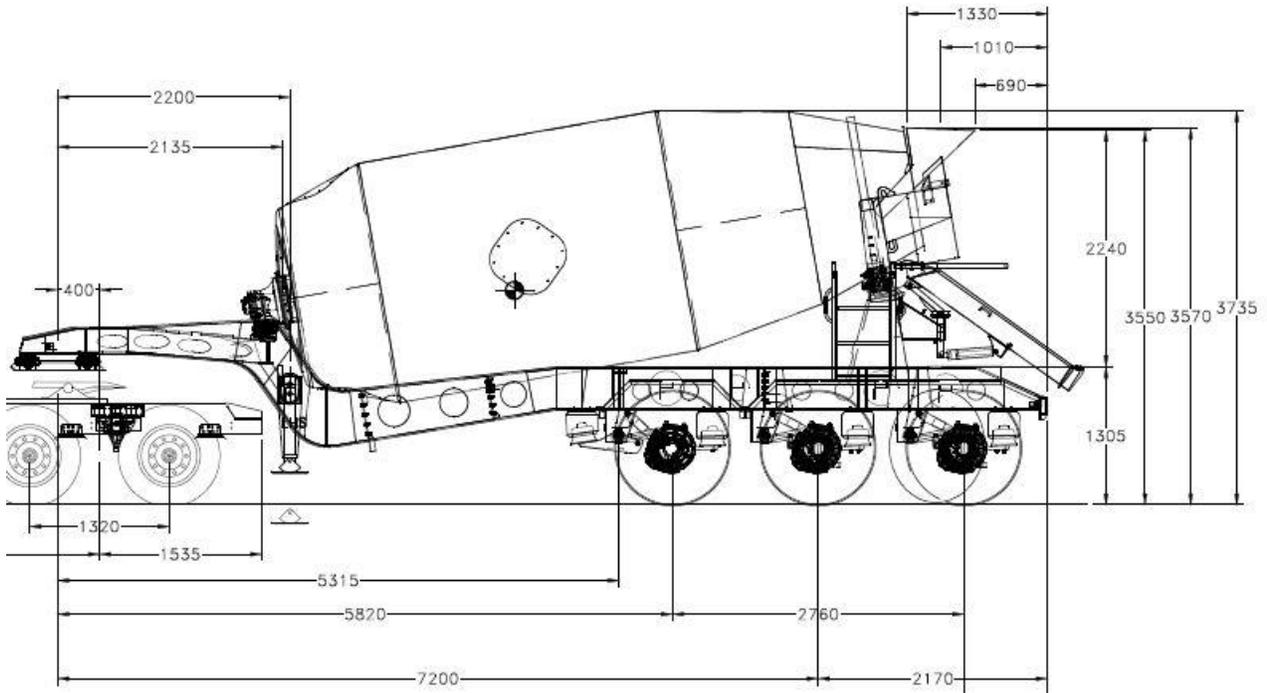

Item	Description	11.5 m ³
1	Operating Weight (approx.) until final specification "Steerable Axles" developed and Prime mover type.	8,900kgs plus water
2	Total Barrel Volume	17.8 m ³
3	Mixing Capacity to AS1379 – 1991	11.5 m ³
4	Gearbox	ZF 7300
5	Hydraulic Pump	130cc/rev
6	Hydraulic Motor	75cc/rev
7	Water System	180 litre alloy p.w.s.
8	Controls	Remote
9	Trunnion Rollers	4 x Nylon
10	Chutes – 2 x Extension, 1 x Placement	Poly
11	Front trailer axle	Lift function
12	Middle trailer axle	Steerable up to 32°
13	Rear trailer axle	Steerable up to 32°

Advances in design or improvements in materials are incorporated without delay, consequently we reserve the right to alter details given on this specification sheet without notice. Operating weight and centre of gravity may vary depending on selected options.

Cesco Australia Limited

Brisbane:	Head Office:	38 Goodman Place Murarrie Q 4172	Ph: (07) 3908 6088	Fax: (07) 3390 6898
Gold Coast:	Mixer Service Centre	2/6 31 Rudman Parade Andrews Q 4220	Ph: (07) 5593 7066	Fax: (07) 5593 7477
Melbourne:	Mixer Service Centre:	76-78 Hallam South Road Hallam Vic 3903	Ph: (03) 9796 4977	Fax: (03) 97964811

Authorised Distributors

Sydney:	Davcron Pty Ltd	5 Tennyson Street Granville NSW 2142	Ph: (02) 9637 8186	Fax: (02) 9637 5184
Perth:	Precedence Eng.	10 Drummond Place West Perth WA 6005	Ph: (08) 9328 4818	Fax: (08) 9328 9786
New Zealand:	MIMICO	88-90 Takani School Road, Takani, Auckland	Ph: +64 2679 702	Fax: +64 2679 720

Authorised Agent

Adelaide:	Marleston Eng.	40 Manchester Street Mile End SA 5031	Ph: (08) 8443 6766	Fax: (08) 8443 6832
-----------	----------------	---------------------------------------	--------------------	---------------------

Visit our website: www.cescoaustralia.com

A member of the ZICOM GROUP